Day Rifle Scope

DHF 3-12x50
DHF 5-20x56

1st focal plane





Application

- Hunting

Features

- Multy-layer blooming of glass surfaces
- Absence of distortion of space for all magnifications
- Optimal image contrast
- Wide field of view
- Wide range of adjustment
- Precision mechanism of input of vertical adjustments «Zero Stop»
- Electronic control of reticle level
- Adjustable brightness of red dot in the reticle
- Shockproof with heavy recoil (.50 BMG)
- Waterproof and light weight

New Vision Dedal-NV

Joint-Stock Company Dedal-NV
18, Stromynka str., Moscow, 107076, Russia
Tel: +7 (495) 589-31-01
Tel/Fax: +7 (495) 617-0596 • +7 (495) 961-2749
info@dedalnvoptics.com • www.dedalnvoptics.com

Day Rifle Scope

DHF 3-12x50
DHF 5-20x56






Technical specifications

General	DHF 3-12x50	DHF 5-20x56
Magnification (variable), x	3-12	5-20
Effective objective lens	50 mm	56 mm
Field of view, degree m/100 m	6.8-1.7 11.9-3.0	4.1-1.0 7.1-1.7
Diopter setting, D	+3, -3	
Eye relief distance, mm	80 - 100	
Tactical windage/ Elevation adjustment per click	10 mm/100 m	
Elevation adjustment Windage adjustment	3.2 m/100 m ±0.8 m/100 m	3.2 m/100 m ±0.8 m/100 m
Range of working temperatures, °C	-40 to +50	
Relative humidity, %	up to 98%	
Dimensions, mm	365x86x80	395x86x83
Weight (without mount), kg	0.74	0.84

Electronic Level Control

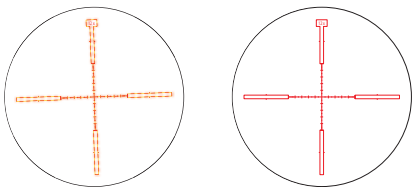

No correct level:
red flash

Correct level:
static red colour